


CollabNet Subversion Manage users

- User 생성
- User 정보 및 권한 변경
- User 삭제

User 생성

User 생성을 하기 위해 <http://ipaddress:3343> 접속을 한다. 상단의 메뉴 Users 클릭 생성 아이콘을 클릭 한다.

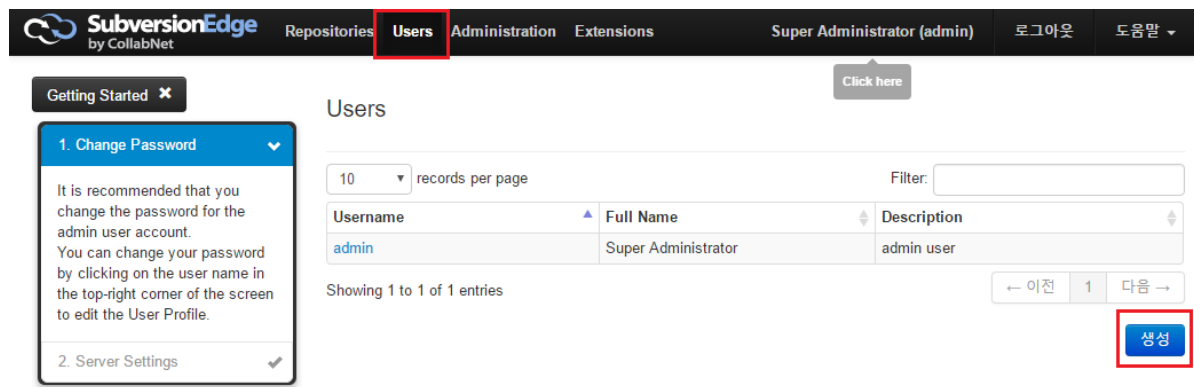

Create User

아래의 그림은 User를 생성 하는 화면 이다. 각 필드의 대한 설명이다.

User를 생성할때 적절한 룰 권한을 설정하여 User를 생성 한다.

- Login Name
- Full Name
- Password
- Confirm Password
- Email
- Description
- Roles Granted
 - ROLE_ADMIN - Super/Root Administrator (Full Privileges)
 - ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
 - ROLE_ADMIN_REPO - Repositories Administrator
 - ROLE_ADMIN_SYSTEM - System/Server Administrator
 - ROLE_ADMIN_USERS - User Account Administrator
 - ROLE_USER - Basic User Authority, required for console access

SubversionEdge by CollabNet

Repositories **Users** Administration Extensions Super Administrator (admin) 로그아웃 도움말

Getting Started ✕

1. Change Password ▼

It is recommended that you change the password for the admin user account. You can change your password by clicking on the user name in the top-right corner of the screen to edit the User Profile.

2. Server Settings ✓

USERS

[User List](#)

[Role List](#)

Tip: Looking for Subversion-specific reports, such as commit activity? [Connect to TeamForge](#) and get reports on your Subversion activity as well as additional functionality such as code search and code review.

Create User

Login Name:

Full Name:

Password:

Confirm Password:

Email:

Description:

Roles Granted:

- ☐ ROLE_ADMIN - Super/Root Administrator (Full Privileges)
- ☒ ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
- ☒ ROLE_ADMIN_REPO - Repositories Administrator
- ☒ ROLE_ADMIN_SYSTEM - System/Server Administrator
- ☒ ROLE_ADMIN_USERS - User Account Administrator
- ☒ ROLE_USER - Basic User Authority, required for console access

생성

User가 생성이 된 것을 확인 할 수 있다.

SubversionEdge by CollabNet

Repositories **Users** Administration Extensions Super Administrator (admin) 로그아웃 도움말

Getting Started ✕

1. Change Password ▼

It is recommended that you change the password for the admin user account. You can change your password by clicking on the user name in the top-right corner of the screen to edit the User Profile.

2. Server Settings ✓

USERS

[User List](#)

[Role List](#)

Users

10 records per page Filter:

Username	Full Name	Description
admin	Super Administrator	admin user
curvc	curvc.test	

Showing 1 to 2 of 2 entries

← 이전 1 다음 →

생성

User 정보 및 권한 변경

User 정보를 변경 하거나 권한 변경을 하기 위해서 ROLE_ADMIN_USERS 권한을 가진 User가 필요하다. 또는 슈퍼 권한을 가진 User가 일반 유저의 정보나 권한 변경이 가능하다.

아래 그림은 일반 유저를 생성하여 일반 유저를 정보를 변경하거나 권한을 변경하는 예제 이다.

먼저 일반 유저를 생성한다.

SubversionEdge
by CollabNet
Repositories Users Administration Extensions
curvc.test (curvc) 로그아웃 도움말

USERS
[User List](#)
[Role List](#)

Tip: TeamForge extends Subversion access control to include wildcard characters in path-based access rules. This allows you to define a rule for a path like `/**/secure` and have it apply to all folders named "secure" anywhere they exist in your repository.

Create User

Login Name:
Full Name:
Password:
Confirm Password:
Email:
Description:

Roles Granted:
☐ ROLE_ADMIN - Super/Root Administrator (Full Privileges)
☐ ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
☐ ROLE_ADMIN_REPO - Repositories Administrator
☐ ROLE_ADMIN_SYSTEM - System/Server Administrator
☐ ROLE_ADMIN_USERS - User Account Administrator
☒ ROLE_USER - Basic User Authority, required for console access

생성

User List의 새로 생성한 일반 user1를 클릭한다.

SubversionEdge
by CollabNet
Repositories Users Administration Extensions
curvc.test (curvc) 로그아웃 도움말

USERS
[User List](#)
[Role List](#)

Tip: You only need to create user accounts for built-in users. If using LDAP, your users are created and managed by your LDAP server, such as Windows Active Directory. Users can login to the console with their LDAP credentials and that will create a "user placeholder" account to which you can assign administrator roles if desired.

Users

10 records per page Filter:


Username	Full Name	Description
admin	Super Administrator	admin user
curvc	curvc.test	
<u>user1</u>	user1	Normal_user1

Showing 1 to 3 of 3 entries

← 이전 1 다음 →

생성

패스워드 변경시 Change Password를 클릭 한다.


[Repositories](#)
[Users](#)
[Administration](#)
[Extensions](#)
curvc.test (curvc)
[로그아웃](#)
[도움말](#)

USERS

[User List](#)
[Role List](#)

Tip: Want to delegate administrative functionality in a more fine-grained manner?

Connect Subversion Edge to [TeamForge](#) -- which introduces the concept of projects. A user can be an administrator for one project and not even be able to see that other projects exist.

Edit User

Login Name: user1
[Change Password](#)

Full Name:

Email:

Description:


Roles Granted:

- ☐ ROLE_ADMIN - Super/Root Administrator (Full Privileges)
- ☐ ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
- ☐ ROLE_ADMIN_REPO - Repositories Administrator
- ☐ ROLE_ADMIN_SYSTEM - System/Server Administrator
- ☐ ROLE_ADMIN_USERS - User Account Administrator
- ☒ ROLE_USER - Basic User Authority, required for console access

Update

Delete

Password 및 정보를 변경하고 권한을 추가 해주고 Update 버튼을 클릭한다.


[Repositories](#)
[Users](#)
[Administration](#)
[Extensions](#)
curvc.test (curvc)
[로그아웃](#)
[도움말](#)

USERS

[User List](#)
[Role List](#)

Tip: Want to delegate administrative functionality in a more fine-grained manner?

Connect Subversion Edge to [TeamForge](#) -- which introduces the concept of projects. A user can be an administrator for one project and not even be able to see that other projects exist.

Edit User

Login Name: user1

Password:
[Cancel Password Change](#)

Confirm Password:

Full Name:

Email:

Description:

Roles Granted:

- ☐ ROLE_ADMIN - Super/Root Administrator (Full Privileges)
- ☐ ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
- ☒ [ROLE_ADMIN_REPO - Repositories Administrator](#)
- ☐ ROLE_ADMIN_SYSTEM - System/Server Administrator
- ☐ ROLE_ADMIN_USERS - User Account Administrator
- ☒ ROLE_USER - Basic User Authority, required for console access

Update

Delete

User가 변경 되었음을 확인 할 수 있다.

SubversionEdge by CollabNet

Repositories Users Administration Extensions curvc.test (curvc) 로그아웃 도움말 ▾

✓ User "user1" 갱신 되었습니다.

USERS
[User List](#)
[Role List](#)

Tip: Delegate administration responsibilities to select users by adding them to one of the Administrator Roles. LDAP users can also be given administration rights. Just ask the user to login to the console and this will create a "LDAP User" account that you can then assign to the role.

Users

Login Name: user1
 Full Name: user1
 Email: user1@a.com
 Description: Repositories_user1

Roles Granted:

- [ROLE_ADMIN_REPO](#) (Repositories Administrator)
- [ROLE_USER](#) (Basic User Authority, required for console access)

[Edit](#) [Delete](#)

User 삭제

User 삭제를 하기 위해서 ROLE_ADMIN_USERS 권한을 가진 User가 필요하다. 또는 슈퍼 권한을 가진 User가 일반 유저를 삭제가 가능하다.

상단 Users 클릭 User List의 삭제 해야 할 유저를 클릭 한다.

SubversionEdge by CollabNet

Repositories **Users** Administration Extensions curvc.test (curvc) 로그아웃 도움말 ▾

USERS
[User List](#)
[Role List](#)

Tip: Consider connecting your Subversion Edge server to TeamForge for enhanced permissions management functionality. TeamForge provides a Role-Based Access Control model that allows you to delegate permissions management to project teams.

Users

10 records per page Filter:


Username	Full Name	Description
admin	Super Administrator	admin user
curvc	curvc.test	
user1	user1	Repositories_user1

Showing 1 to 3 of 3 entries

← 이전 1 다음 →

[생성](#)

Delete 버튼을 클릭 한다.


Repositories Users Administration Extensions
curvc.test (curvc) 로그아웃 도움말

USERS

User List

Role List

Tip:

Enter a valid email address for all user accounts (including the admin user) so that they can receive email notifications when jobs complete.

Edit User

Login Name:

user1

Change Password

Full Name:

user1

Email:

user1@a.com

Description:

Repositories_user1


Roles Granted:

☐ ROLE_ADMIN - Super/Root Administrator (Full Privileges)
 ☐ ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
 ☒ ROLE_ADMIN_REPO - Repositories Administrator
 ☐ ROLE_ADMIN_SYSTEM - System/Server Administrator
 ☐ ROLE_ADMIN_USERS - User Account Administrator
 ☒ ROLE_USER - Basic User Authority, required for console access

Update

Delete

OK 버튼을 클릭 한다.


Repositories Users Administration Extensions
curvc.test (curvc) 로그아웃 도움말

USERS

User List

Role List

Tip:

Enter a valid email address for all user accounts (including the admin user) so that they can receive email notifications when jobs complete.

Edit User

Description:

Repositories_user1

Roles Granted:

☐ ROLE_ADMIN - Super/Root Administrator (Full Privileges)
 ☐ ROLE_ADMIN_HOOKS - Repository Hook Scripts Administrator
 ☒ ROLE_ADMIN_REPO - Repositories Administrator
 ☐ ROLE_ADMIN_SYSTEM - System/Server Administrator
 ☐ ROLE_ADMIN_USERS - User Account Administrator
 ☒ ROLE_USER - Basic User Authority, required for console access

Update

Delete


확인

Are you sure?

OK

취소

선택한 User가 삭제 되었음을 확인 할 수 있다.


Repositories Users Administration Extensions
curvc.test (curvc) 로그아웃 도움말

USERS

User List

Role List

Tip:

TeamForge extends Subversion access control to include wildcard characters in path-based access rules. This allows you to define a rule for a path like /**/secure and have it apply to all folders named "secure" anywhere they exist in your repository.

Users

10 records per page

Filter:

Username	Full Name	Description
admin	Super Administrator	admin user
curvc	curvc.test	

Showing 1 to 2 of 2 entries

← 이전

1

다음 →

생성

✓ User "user1" 삭제 되었습니다.

참고 문서

[Manage users](#)