

Bitbucket 7.7 release notes 릴리즈 노트

이 문서는 2020년 10월 22일 출시된 Bitbucket 7.7 Release Note를 공유하기 위해 작성 되었다.

Highlights

- 새로운 코드 리뷰 워크플로우 - 코멘트 배치 및 게시
- Jupyter notebook 렌더링
- 비활성 풀 리퀘스트 자동 거절
- 코멘트 반응은 [여기에서](#)
- 이해하기 쉬운 색으로 diff 보기

새로운 코드 리뷰 워크플로우 - 코멘트 배치 및 게시

SERVER

DATA CENTER

풀 리퀘스트 검토자는 검토 중에 파일 및 코드에 대하여 여러 코멘트를 작성할 수 있습니다.

준비가 된 후에 한 개씩 보내지 말고 한 번에 다 보내세요.

이 새로운 코드 리뷰 워크플로우는 시간을 절약하고 풀 리퀘스트 작성자와 불필요한 의견이 오가는 것을 줄여줍니다.

Jupyter notebook 렌더링

SERVER

DATA CENTER

Bitbucket Server 및 Data Center은 Jupyter notebook 렌더링을 지원합니다.

코드, 데이터 및 시각화를 결합한 아이디어를 공유함으로써 개발자와 데이터 과학자가 각자의 팀들과의 협력이 필요하다는 것을 알고있습니다.

바로 시험해보길 원하시나요? 렌더링된 노트북을 보려면 Bitbucket의 새로운 리포지토리 또는 기존 리포지토리에 `.ipynb` 파일을 커밋하세요.

Source view

Diff to previous

History ▾

1.67 MB

Show source

Edit

Blame

Raw file

matplotlib - 2D and 3D plotting in Python

Matplotlib is an excellent 2D and 3D graphics library for generating scientific figures. Some of the many advantages of this library include:

- Easy to get started
- Support for \LaTeX formatted labels and texts
- Great control of every element in a figure, including figure size and DPI.
- High-quality output in many formats, including PNG, PDF, SVG, EPS, and PGF.
- GUI for interactively exploring figures *and* support for headless generation of figure files (useful for batch jobs).

More information at the Matplotlib web page: <http://matplotlib.org/>


```
In [3]: import matplotlib
import matplotlib.pyplot as plt
```

```
In [4]: import numpy as np
```

MATLAB-like API


Example

```
In [7]: figure()
plot(x, y, 'r')
xlabel('x')
ylabel('y')
title('title')
show()
```

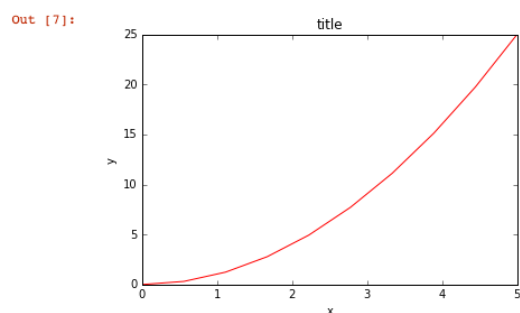

Most of the plotting related functions in MATLAB are covered by the `pylab` module. For example, subplot and color/symbol selection:

```
In [8]: subplot(1,2,1)
plot(x, y, 'r--')
subplot(1,2,2)
plot(y, x, 'g*')
```

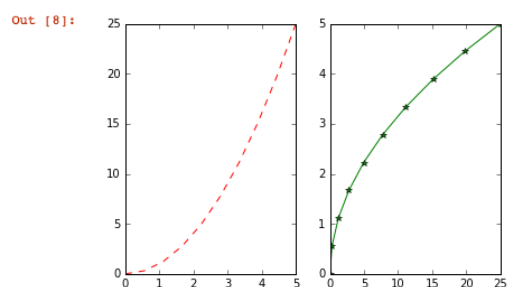

비활성 폴 리퀘스트 자동 거절

SERVER

DATA CENTER

목록에는 수많은 풀 리퀘스트들이 쌓여가 원치않는 혼란을 야기합니다.
 새로운 풀 리퀘스트 자동 거절 옵션의 사용은 생산성을 높이고 Bitbucket Data Center 인스턴스의 성능을 최대화할 수 있습니다.
 기본 옵션으로 프로젝트의 개별 또는 모든 리포지토리에서 설정할 수 있습니다.

Auto-decline pull requests

Reduce clutter by automatically declining inactive pull requests that have not had comments, pushes, or approvals within a set amount of time. [Learn more about auto-decline pull requests.](#)

Auto-decline pull requests settings

☐ Inherit from the [project settings](#)

☒ Use custom settings

☒ Auto-decline inactive pull requests. Decline after 4 weeks ▼

Save

Cancel

코멘트 반응은 여기에서

SERVER

DATA CENTER

119 + `R.prototype.remove = function () {`



Omar Darboe A moment ago ↗

Could you add a comment for this change? Thanks!

Reply · Edit



🔍 Search...

Last used



Popular



All emojis



```
120 + R.eve("raphael.r
121 + this.canvas.pare
122 + for (var i in th
123 + this[i] = ty
124 + : null;
125 + return true;
126 + };
127 +
128 +
129 +
130 +
```

코멘트에 응답하는 것이 쉬워졌습니다. 어느 코멘트에도 코멘트 반응으로 이모티콘을 추가할 수 있습니다.
 그래서 빨리 를 주거나, 와 같은 표시를 하거나, 약간의 추가를 원하든, 적절한 이모티콘을 몇 번의 클릭만으로 추가할 수 있습니다.

Add reaction 버튼  을 선택하여 사용해 보세요.

이해하기 쉬운 색으로 diff 보기

SERVER

DATA CENTER

이번 릴리즈에서는 diff에 대한 새로운 설정을 포함합니다.
 추가 및 삭제된 각 라인에 대하여 파란색과 노란색을 사용하여 이해하기 쉽게 색깔 옵션으로 변경할 수 있습니다.
 한번 활성화되면, diff 보기에서 색이 바로 변경됩니다.

36 36		Instead, it will copy all the configuration files and the transitive dependencies (Webpack, Babel, ESLint, etc) right into your project so you have full control over them. All of the commands except `eject` will still work, but they will point to the copied scripts so you can tweak them. At this point you're on your own.
37 37		
38 -		You don't have to ever use `eject`. The curated feature set is suitable for small and middle deployments, and you shouldn't feel obligated to use this feature. However we understand that this tool wouldn't be useful if you couldn't customize it when you are ready for it.
38 +		You don't have to ever use `eject`. The curated feature set is suitable for small and middle deployments, and you shouldn't feel obligated to use this feature. However we understand that this tool wouldn't be useful if you couldn't customize it when you are ready for it.
39 39		
40 40		## Learn More
41 41		

36 36		Instead, it will copy all the configuration files and the transitive dependencies (Webpack, Babel, ESLint, etc) right into your project so you have full control over them. All of the commands except `eject` will still work, but they will point to the copied scripts so you can tweak them. At this point you're on your own.
37 37		
38 -		You don't have to ever use `eject`. The curated feature set is suitable for small and middle deployments, and you shouldn't feel obligated to use this feature. However we understand that this tool wouldn't be useful if you couldn't customize it when you are ready for it.
38 +		You don't have to ever use `eject`. The curated feature set is suitable for small and middle deployments, and you shouldn't feel obligated to use this feature. However we understand that this tool wouldn't be useful if you couldn't customize it when you are ready for it.
39 39		
40 40		## Learn More
41 41		

지원 플랫폼 업데이트

- Gir2.29 Server

지원 중단

Bitbucket Server 8.0부터 MariaDB 10.1에 대한 지원이 중단됩니다.